

VR RADIAL SHAFT SEAL-Double Lip SAB

PRODUCT APPLICATION

Sealing of shafts. Rotary shaft seal (RWDR) in dimensions in accordance with DIN 3760.

PRODUCT ADVANTAGES

- Low coefficient of friction
- Low power loss and high service life values
- Low pumping effect due to tangential and radial preload
- High pressure stability
- No post-treatment of the shaft material, such as hardening, nitriding, hard chrome plating or additional liners required



MATERIAL

Sleeve / Membrane	NBR
	HNBR
	FKM
	EPDM
	FFKM *
Support Ring/Body	Aluminium
	Stainless steel (1.4301) *

* Other materials on enquiry.

OPERATING CONDITIONS

Temperature	-50 °C to 220 °C**
Circumferential speed	40* m/s for 0 MPa
Pressure (Pmin to Pmax)	0.06* MPa to 1.5* MPa

* Value depends on other application parameters and the elastomer used.

** Value dependent on other application parameters and the elastomer used.

TOLERANCE

Surface Element	Surface Tolerance	Roundness
Shaft	IT1	IT8
Housing	ISO tolerance H8	

*Depending on increase in rotational speed, the radial shaft deflection may need to be more tightly adjusted. Please enquire.

SURFACE QUALITY




Surface Element	Rz	Ra / Rt
Shaft	1 – 5 µm	0.1 – 0.8 µm
Housing	4.0 µm ≤ Rz ≤ 8.0 µm	Ra ≤ 3 µm Rt ≤ 16 µm

*Please observe our general design notes in catalogue.

Shaft Surface Hardness:

- Simple applications: 25 – 30 HRC
- Normal applications: Min. 40 HRC
- External dirt ingress or contaminated media: Min. 55 HRC

P - V DIAGRAM

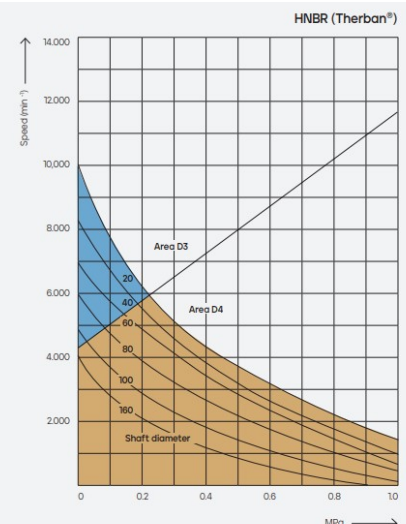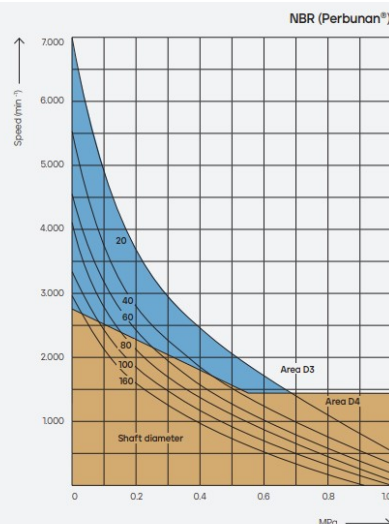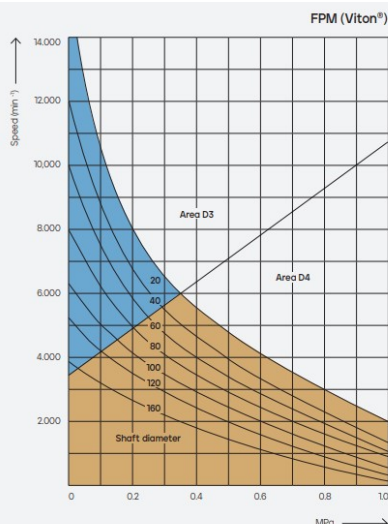



SAB Double Lip Seal

support body / diameter

D3 = D1 + 1.0mm to D1 = 145mm

D4 = D1 + 0.5mm

D3 = D1 + 1.5 mm from D1 = 150mm

D4 = D1 + 1.0 mm


Housing - diameter D5 min.

D5 = (D1 + D2) / 2

For an axial fixation, the SAB-seal 0.5mm can be compressed

by the adjacent component.

e.g. B = 3.5 becomes 3.0 mm

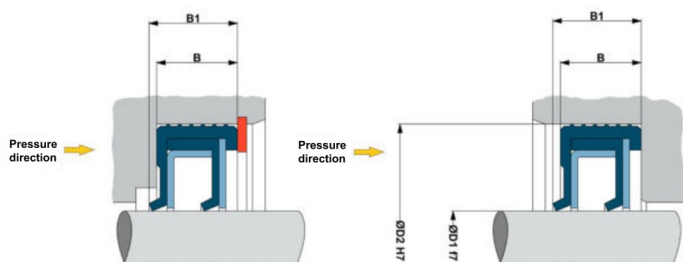

D1	D2	B	B1	B2	D1	D2	B	B1	B2	D1	D2	B	B1	B2	D1	D2	B	B1	B2
					20	30	7	8,5	9,5	42	55	10	12	13	85	110	10	12,5	13,5
						32					62					120	12	14,5	15,5
						35					72				90	110	10	12,5	13,5
						40				45	60	10	12	13		120	12	14,5	15,5
						47					62				95	120	12	14,5	15,5
6	16	7	8	9	22	32	7	8,5	10		65				125				
	22					35					72				100	120	12	14,5	15,5
						40				48	62	10	12	13		125			
7	16	7	8,5	9		47					72				130				
	22				24	35	7	9	10	50	65	10	12	13	105	130	12	14,5	15,5
8	16	7	8,5	9,5		37					68				140				
	22					40					72				110	130	12	14,5	15,5
	24					47					80				140				
9	22	7	8,5	9,5	25	35	7	9	10	52	68	10	12	13	115	140	12	14,5	15,5
	24					40					72				150				
	26					42				55	70	10	12	13	120	150	12	14,5	15,5
10	22	7	8,5	9,5		47					72				160				
	24					52	9	11	12		80				125	150	12	14,5	15,5
	26				26	37	7	9	10		85				160				
11	22	7	8,5	9,5		42				56	70	10	12	13	130	160	12	14,5	15,5
	26					47					72				170				
					28	40	7	9	10		80				135	170	12	14,5	15,5
12	22	7	8,5	9,5		47					85				140	170	12	14,5	15,5
	24					52	9	11	12	58	72	10	12	13	145	175	15	17,5	18,5
	28				30	40	7	9	10		80				150	180	15	17,5	18,5
	30					42				60	75	10	12,5	13,5	160	190	15	17,5	18,5
						45					80				170	200	15	17,5	18,5
14	24	7	8,5	9,5		47					85				180	210	15	17,5	18,5
	28					50					90				190	220	15	17,5	18,5
	30					52	9	11	12	62	85	10	12,5	13,5	200	230	15	18	19
	35					62	10	12	13		90				210	240	15	18	19
15	26	7	8,5	9,5	32	45	7	9	10	63	85	10	12,5	13,5	220	250	15	18	19
	30					47					90				230	260	15	18	19
	32					52	9	11	13	65	85	10	12,5	13,5	240	270	15	18	19
	35				35	47	7	9	10		90				250	280	15	18	19
16	28	7	8,5	9,5		50					100				260	300	20	24	25
	30					52	9	11	12	68	90	10	12,5	13,5	280	320	20	24	25
	32					62	10	12	13		100				300	340	20	24	25
	35				36	47	7	9	10	70	90	10	12,5	13,5	320	360	20	24	25
17	28	7	8,5	9,5		50					100				340	380	20	24	25
	30					52	9	11	12	72	95	10	12,5	13,5	360	400	20	24	25
	32					62	10	12	13		100				380	420	20	24	25
	35				38	52	9	11	12	75	95	10	12,5	13,5					
	40					55	10	12	13		100								
18	30	7	8,5	9,5		62				78	100	10	12,5	13,5					
	32				40	52	9	11	12	80	100	10	12,5	13,5					
	35					55	10	12	13		110								
	40																		
						72													